

Vacuum Tube

Features


- The extremely pliant Vacuum Tube can be used for swinging parts around actuators.

Specification

Fluid admitted	Compressed air	
Service pressure range	NC0425, 0640	0~44psi (0~0.3MPa)
	NC0860, 1075, 1290	0~29psi (0~0.2MPa)
Negative pressure	-29.5in. Hg (-100KPa)	
Service temperature range	-5~122°F (-15~50°C) (No freezing)	

*Be sure to use insert ring.

Model Designation(Example)

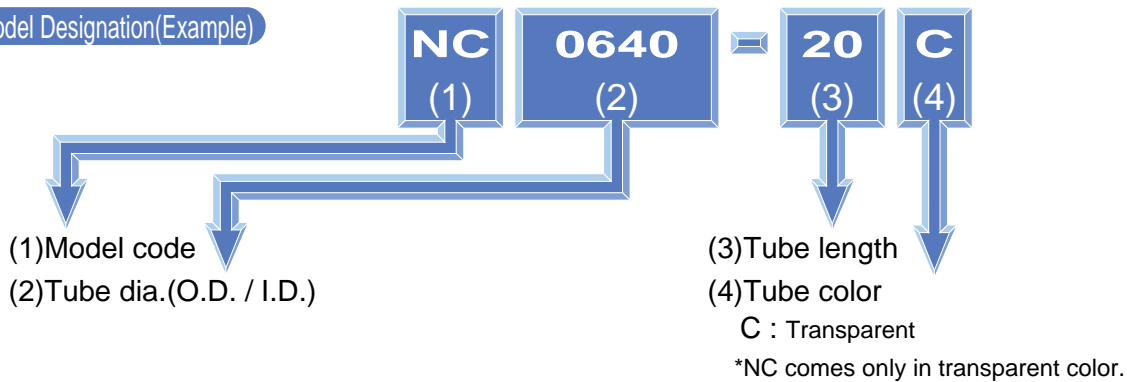

⚠ Detailed Safety Instructions

Before using the PISCO device, be sure to read the "Safety Instructions", "Common Safety Instructions for Products Listed in This Manual" on pages 23~24 and "Common Safety Instructions for Tubes" on page 551.

NC Super-soft Nylon Tube



Model	Tube O.D. (φmm)	Tube I.D. (φmm)	Standard length (m)	Min.bend radius (mm)	Burst pressure (MPa)	Mass (g/m)
NC 0425	4	2.5	20·100	8	1.37	9
NC 0640	6	4	20·100	12	1.37	17
NC 0860	8	6	20·100	27	0.88	23
NC 1075	10	7.5	20·100	34	0.78	36
NC 1290	12	9	20·100	38	0.78	52