

⚠ Detailed Safety Instructions


Before using the PISCO device, be sure to read the "Safety Instructions", "Common Safety Instructions for Products Listed in This Manual" on page 23~24 and "Common Safety Instructions for Change Series Valves" on page 279.

⚠ Caution

1. When operating the cock, turn it 90 degrees completely until it stops. Inadequate turning may result in poor conduction or low flow rate due to faulty switching.
2. Check the arrow mark on the cock before actually introducing air.
3. For use with negative pressures, provide a vacuum filter on the suction side. Otherwise dust sucked in may cause malfunction.

HBV

Union Type

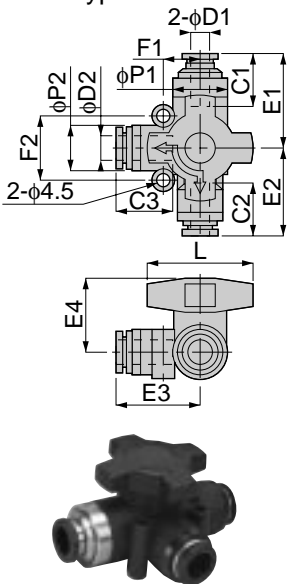

unit:mm

Model	Tube dia. φD1	Tube dia. φD2	L	φP1	φP2	C1	C2	C3	E1	E2	E3	E4	F1	F2	Mass (g)
HBV 6-6	6	6	35	17.5	14.5	17	17	17	27	29	27	24	12	20	50.5
HBV 8-6	6	8	35	17.5	14.5	17	17	18.5	27	29	27	24	12	20	51
HBV 8-8	8					18.5	18.5		28.5						50
HBV 10-10	10	10	44	24	21	21	21.5	21.5	36.5	37	35	28	15	25	122.5
HBV 12-10	10	12	44	24	21	21	21.5	23.5	36.5	37	35	28	15	25	123.5
HBV 12-12	12					23.5	23.5		37						118.5

Model	Orifice dia. (φmm)	Eff. Area (mm ²)
HBV 6-6	5	9
HBV 8-6	5	11
HBV 8-8	6	17
HBV 10-10	9	24
HBV 12-10	9	24.5
HBV 12-12		34.5