


Tube Fitting Series Die Temperature Control Fitting

unit:mm

AKC
PARTS

Joint Part for Hose only

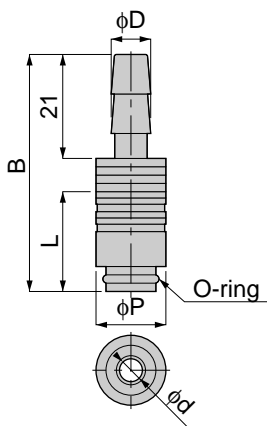

Model	Heat-resistant Hose(I.D.)(ϕ)	ϕD	B	L	ϕP	ϕd	Mass (g)	Orifice (ϕ mm)
AKC 08-ID06BP	6.3	8	46	19	15	4.5	28	4.5
AKC 08-ID09BP	9.5	12	46	19	15	6	32.5	6
AKC 10-ID06BP	6.3	8	51	24	18	4.5	46	4.5
AKC 10-ID09BP	9.5	12	51	24	18	7	45	7


※Use quick-joint type AK for threaded part. AS(threaded part only) is not interchangeable.



unit:mm

ASC

Straight for Hose
Stop Valve Built-in

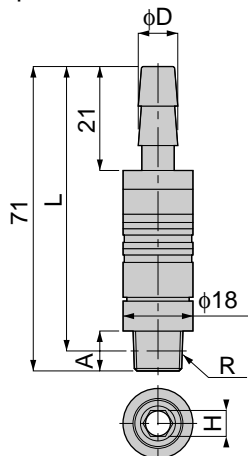


Model	Heat-resistant Hose(I.D.)(ϕ)	ϕD	R	A	L	H	Mass (g)	Orifice (ϕ mm)	Eff.a.(cv) (mm ²)
ASC 10-ID06B01	6.3	8	R1/8	8	67	5	69	4.5	13.2(0.83)
ASC 10-ID06B02			R1/4	11	65	6	68.5		13.6
ASC 10-ID06B03			R3/8	12	64.5	75	(0.87)		
ASC 10-ID09B01	9.5	12	R1/8	8	67	5	75.5	5.3	18.2(1.18)
ASC 10-ID09B02			R1/4	11	65	6	75	6	21.2
ASC 10-ID09B03			R3/8	12	64.5	81.5	(1.34)		



unit:mm

ASC
PARTS

Joint Part for Hose only
Stop Valve Built-in

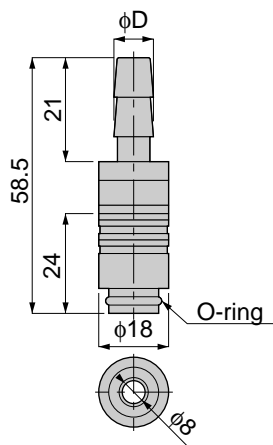

Model	Heat-resistant Hose(I.D.)(ϕ)	ϕD	Mass (g)	Orifice (ϕ mm)
ASC 08-ID06BP	6.3	8	50	4.5
ASC 08-ID09BP	9.5	12	56.5	6

※Use quick-joint type AS for threaded part. AK(threaded part only) is not interchangeable.

